



# iBook G3 14" LCD Cover Replacement

Internal Prerequisite.

Written By: Andrew Bookholt



## INTRODUCTION


Internal prerequisite.

---

### **TOOLS:**

- [Coin](#) (1)
  - [Paper Clip](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
  - [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
  - [Spudger](#) (1)
  - [T8 Torx Screwdriver](#) (1)
-

## Step 1 — LCD Cover

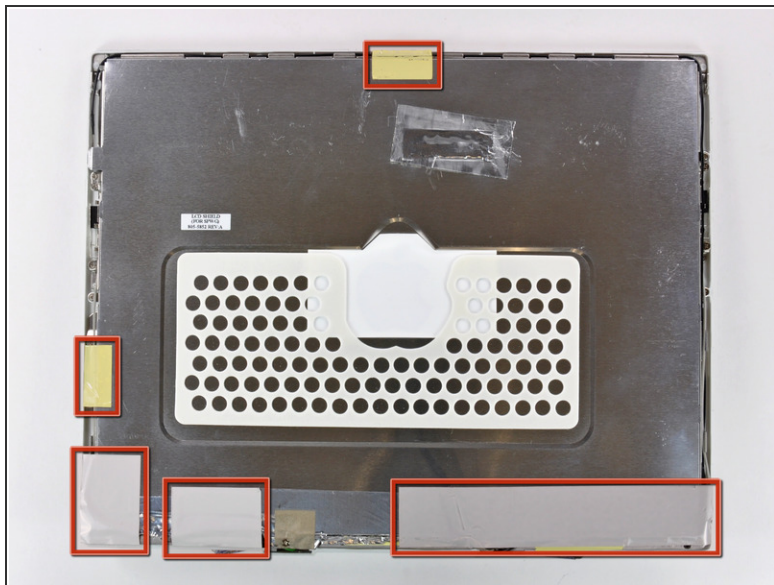

- Remove the pieces of readily removable tape from around the perimeter of the display.
- Carefully remove the aluminum tape covering the display data cable connection.


## Step 2



- Remove the single screw inserted through the piece of EMI tape near the bottom edge of the display.
- Use the tip of a spudger to remove the small washer under the screw you just removed.




## Step 3

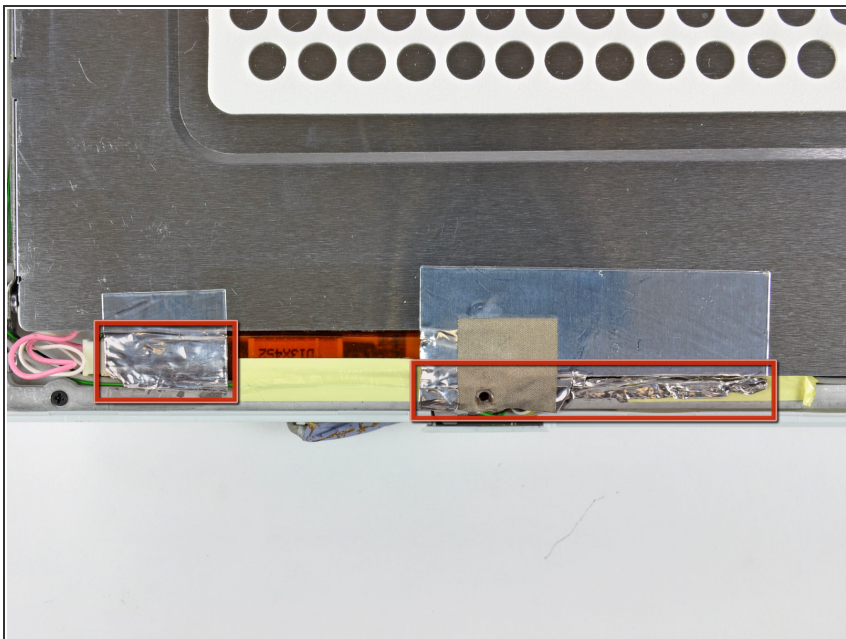

- Peel the aluminum/EMI tape off the cast aluminum frame of the clutch hinges.
- ⓘ It is not necessary to peel the tape off the thin steel LCD cover.

## Step 4

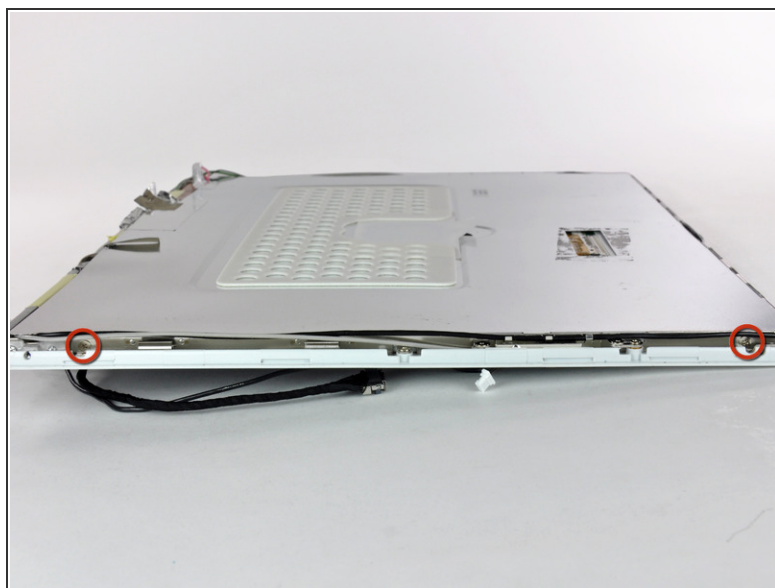

- Remove the two Phillips screws securing each side of the LCD to the clutch hinge frame (four screws total).

## Step 5



- Lift the thin steel LCD cover off the LCD.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 03:17:03 AM.